

SDM BATTERY 340P



Part Number: 400201



40 - 340 NM
MAX SPEED 12,0 RPM
8 PRESETS
LED STATUS INDICATORS

SPECIFICATIONS

- **TORQUE RANGE:** 40 - 340 Nm
- **SPEED:** 12,0 RPM
- **WEIGHT:** 3,2 Kg with battery, excluding reaction arm and impact socket
- **SQUARE DRIVE:** 1/2" square drive
- **BATTERY:** Two Lithium-ion 20V/5.0Ah 100Wh batteries with charger
- **NOISE LEVEL:** Maximum 85 dB
- **TORQUE SETTING:** Torque chart (80 steps)
- **REPEATABILITY ON SAME JOINT*:** +/- 3%.

* Test results from Radial's certified calibration lab

SUITABLE REACTION ARMS

Standard
PN: 301158



Deep socket
PN: 28761



Double ended
PN: 28762



Blank
PN: 28771




Double ended blank
PN: 28765



Safety sliding
PN: 28774



DIMENSIONS IN MM

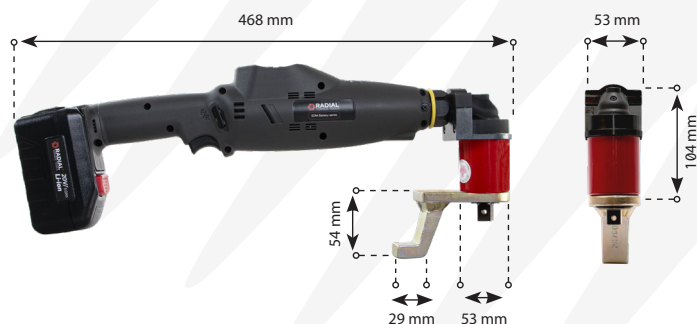

TOOL KIT INCLUDING

- SDM BATTERY 340P
- Standard reaction arm (PN: 301158)
- Two retaining rings (PN: 14360)
- Two batteries with quick charger
- Weatherproof storage case
- Calibration certificate
- Usermanual



ACCESSORIES

Product	Part number
20V Lithium-ion battery 5.0 Ah/100 Wh	3000174
20V Lithium-ion charger for 5.0 Ah	3000134



Non Impacting



Safe & Reliable



Lithium-ion battery



According to European standards



Bluetooth connectivity



Torque + angle function



Software data exchange



LABORATORY ACCREDITATION BUREAU ACCREDITED ISO/IEC 17025

Accredited ISO/IEC 17025



WWW.RADIALTORQUE.EU