


CT – CASSETTE TORQUE SERIES

“The smart low profile torque multiplier”

Combines the best of two worlds; same bolt access as low-profile hydraulic wrenches but with the speed and versatility of pistol grip torque wrenches!

Perfect for valves flanges, BOP's, steel construction and many other places with limited bolt access.

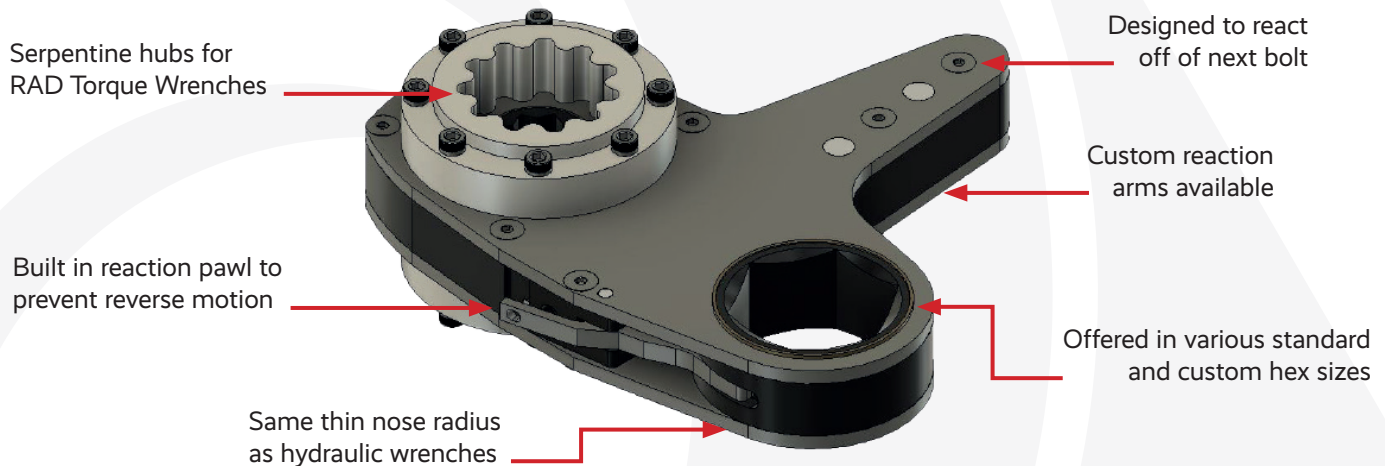



Main advantages:

- Much faster than hydraulic torque wrenches
- Works with 3:1 ratio; a smaller and faster pistol grip multiplier can be used
- Works with standard RAD Battery, Pneumatic or Electric wrenches
- No pumps, hoses, hydraulic oil and high pressure
- No leakages; eliminates all hydraulic wrenches and pump issues
- Much lighter than any hydraulic system – no heavy pump to carry

CT features:

- Same thin nose radius as hydraulic wrenches
- Available in three models for max 2.000 Nm, 4.000 Nm and 10.000 Nm
- Metric Hex sizes 27-110 MM
- Imp Hex sizes 1-1/16" – 3-7/8"
- Built in reaction arm
- Include release lever pawl
- Can be operated from top or bottom side
- Very little maintenance required

THE CASSETTE TORQUE CAN BE DRIVEN FROM THE BOTTOM OR TOP AS SHOW BELOW:

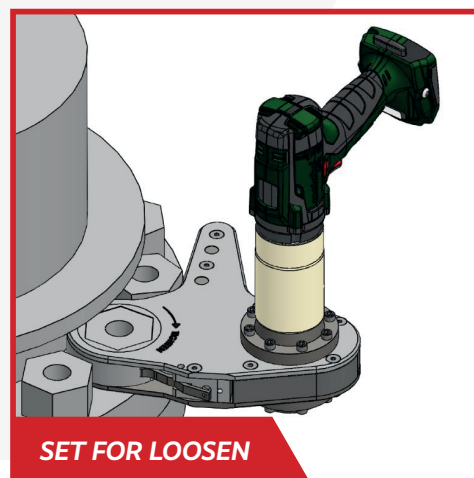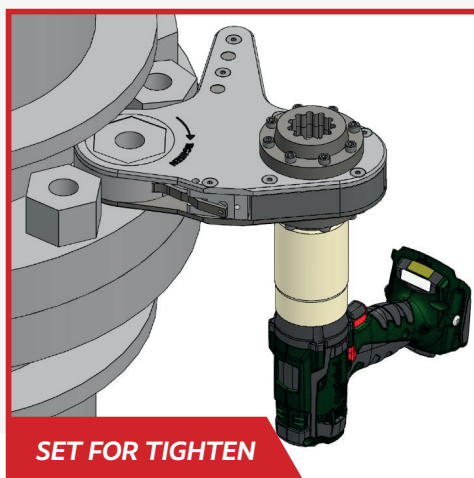


Suitable RAD wrenches:

CT2: B-RAD 700,
RAD 475SL,
V-RAD 6

CT4: B-RAD 1400,
RAD 14 GX,
V-RAD 14,
E-RAD 950

CT8: B-RAD 4000,
RAD 34 GX,
V-RAD 4000,
E-RAD 3400

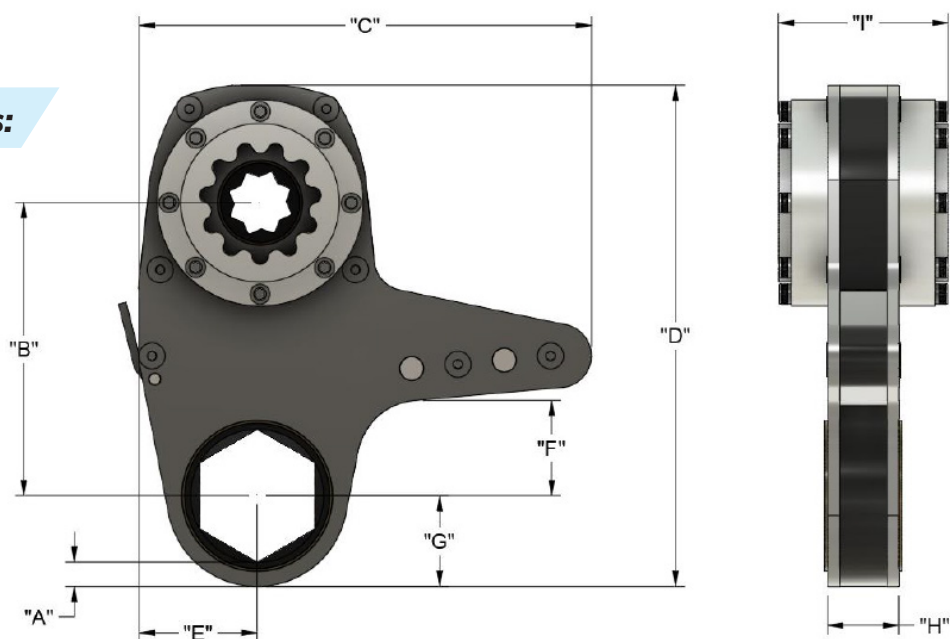

CASSETTE TORQUE 2 – 3/4" SQ. DRIVE INPUT, MAXIMUM TORQUE: 678 Nm IN / 2.034 Nm OUT

DESCRIPTION	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"
CT2 w/ 27MM HEX	10	117	181	118	47	38	21	29	68
CT2 w/ 30MM HEX	11	117	181	138	47	38	25	29	68
CT2 w/ 32MM HEX	10	117	181	138	47	38	25	29	68
CT2 w/ 36MM HEX	10	117	181	159	47	38	29	29	68
CT2 w/ 41MM HEX	10	117	181	180	47	38	33	29	68
CT2 w/ 46MM HEX	10	117	181	200	47	38	36	29	68
CT2 w/ 50MM HEX	10	117	181	221	47	38	40	29	68
CT2 w/ 55MM HEX	10	117	181	242	47	38	44	29	68
CT2 w/ 60MM HEX	10	117	181	263	47	38	48	29	68

CASSETTE TORQUE 4 – 3/4" SQ. DRIVE INPUT, MAXIMUM TORQUE: 1.356 Nm IN / 4.067 Nm OUT

DESCRIPTION	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"
CT4 w/ 46MM HEX	13	156	242	204	64	50	36	38	80
CT4 w/ 50MM HEX	13	156	242	226	64	50	40	38	80
CT4 w/ 55MM HEX	13	156	242	247	64	50	44	38	80
CT4 w/ 60MM HEX	13	156	242	268	64	50	48	38	80
CT4 w/ 65MM HEX	13	156	242	289	64	50	52	38	80
CT4 w/ 70MM HEX	13	156	242	310	64	50	55	38	80
CT4 w/ 75MM HEX	13	156	242	331	64	50	59	38	80
CT4 w/ 80MM HEX	13	156	242	352	64	50	63	38	80

CASSETTE TORQUE 8 – 1" SQ. DRIVE INPUT, MAXIMUM TORQUE: 3.390 Nm IN / 10.169 Nm OUT

DESCRIPTION	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"
CT8 w/ 55MM HEX	16	208	322	249	85	66	44	48	89
CT8 w/ 60MM HEX	16	208	322	270	85	66	48	48	89
CT8 w/ 65MM HEX	16	208	322	292	85	66	51	48	89
CT8 w/ 70MM HEX	16	208	322	313	85	66	55	48	89
CT8 w/ 75MM HEX	16	208	322	334	85	66	59	48	89
CT8 w/ 80MM HEX	16	208	322	356	85	66	62	48	89
CT8 w/ 85MM HEX	19	208	322	399	85	66	70	48	89
CT8 w/ 90MM HEX	16	208	322	399	85	66	70	48	89
CT8 w/ 95MM HEX	19	208	322	441	85	66	77	48	89
CT8 w/ 100MM HEX	16	208	322	441	85	66	77	48	89
CT8 w/ 105MM HEX	19	208	322	484	85	66	85	48	89
CT8 w/ 110MM HEX	16	208	322	484	85	66	85	48	89

All sizes are in millimeters.