

B-RAD X 4000

Part Number: 30984



340 - 4.000 NM

MAX SPEED 3,8 RPM

DIGITAL TORQUE SETTING

HIGH CONTRAST LED DISPLAY

ACTIVE COOLING SYSTEM

TWO-HANDED START OPTION

SPECIFICATIONS

- **TORQUE RANGE:** 400 - 4.000 Nm
- **SPEED:** 3,8 RPM
- **WEIGHT:** 7,8 Kg with battery, excluding reaction arm and impact socket
- **SQUARE DRIVE:** 1 inch square drive (replaceable)
- **BATTERY:** Two 18V Lithium-ion batteries 8.0 Ah/144 Wh
- **NOISE LEVEL:** Maximum 87 dB
- **TORQUE SETTING:** Steps of 1 Nm
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS


Standard
PN: 24639



Deep socket
PN: 24814



Double ended
PN: 25437



Blank
PN: 24813




Double ended blank
PN: 25016



Safety sliding
PN: 29430



DIMENSIONS IN MM

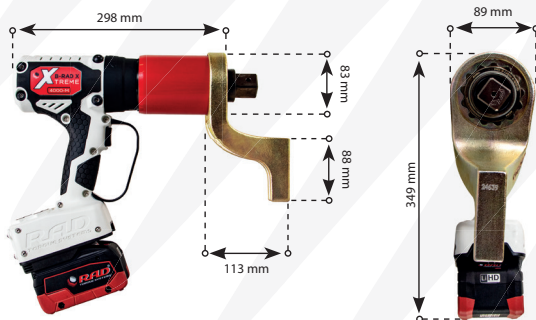

TOOL KIT INCLUDING

- B-RAD X 4000
- Standard reaction arm (PN: 24639)
- Two retaining rings (PN: 21474)
- Swivelling tool handle & hanger
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- QR code for safety instructions
- Weatherproof storage case.



IMPERIAL VERSION

- **MODEL:** B-RAD X 3000
- **PART NUMBER:** 30983
- **TORQUE RANGE:** 250 ft. lbs. – 3000 ft. lbs.
- **WEIGHT:** 17 lbs.



Non Impacting



Safe & Reliable



Lithium-ion battery



According to European standards



Accredited ISO/IEC 17025

B-RAD X SERIES

Accessories

Swivelling tool handle & hanger

Product number	Suitable for
26751	B-RAD X 4000
26674	B-RAD X 7000
22931	B-RAD X 10K
26634	B-RAD X 15K



Top Handle

Product number	Suitable for
30392	B-RAD X 4000, 7000, 10K
33592	B-RAD X 15K



Rear Handle

Product number	Suitable for
30391	B-RAD X 4000, 7000, 10K & 15K



Impact Sockets

Product number	Hex size	Square drive	Bolt size	Suitable for
200227	36MM	1"	M24	B-RAD X 4000
200229	41MM	1"	M27	B-RAD X 4000
200230	46MM	1"	M30	B-RAD X 4000
200007	50MM	1"	M33	B-RAD X 4000
200008	55MM	1"	M36	B-RAD X 4000
200009	60MM	1"	M39	B-RAD X 4000
200238	55MM	1½"	M36	B-RAD X 7000, 10K & 15K
200297	60MM	1½"	M39	B-RAD X 7000, 10K & 15K
300052	70MM	1½"	M45	B-RAD X 7000, 10K & 15K
200197	75MM	1½"	M48	B-RAD X 7000, 10K & 15K
200241	80MM	1½"	M49	B-RAD X 7000, 10K & 15K
200298	90MM	1½"	M52	B-RAD X 7000, 10K & 15K
300053	100MM	1½"	M68	B-RAD X 7000, 10K & 15K
200209	110MM	1½"	M72	B-RAD X 7000, 10K & 15K

Soft Sling

Product number	Suitable for
30393	B-RAD X 4000, 7000, 10K & 15K



Non Impacting



Safe & Reliable



Lithium-ion battery



According to European standards



LABORATORY ACCREDITATION BUREAU ACCREDITED ISO/IEC 17025

Accredited ISO/IEC 17025

2025 - V.01 Disclaimer: The information in this document is subject to change without notice. While endeavored to keep the information up to date and correct, no rights can be derived. If there are any doubts or questions, please contact Radial Torque Tools B.V..

RAD
TORQUE SYSTEMS

WWW.RADIALTORQUE.EU